


ES Controller User Manual



Power-Off Button:

The controller will automatically power off after 15 minutes of inactivity. When connected via USB or Auto-Continuous Fire (Turbo) is active, the controller will not power off.

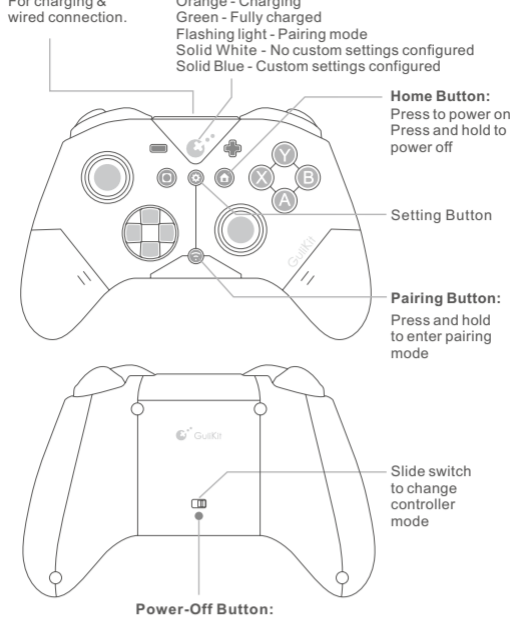

CAUTION!

This product contains small parts (such as buttons, joystick caps, and screws) that may pose a choking hazard if swallowed by children.

Joysticks Calibration

While the controller is powered on, press and hold the "L," "R," "D-pad Left," and "B" buttons simultaneously for 6 seconds to enter calibration mode.

During calibration, rotate both the left and right joysticks in full circles 2 to 3 times.

Once calibration is complete, the controller will vibrate once to indicate success and will automatically exit calibration mode.

Pairing Methods with PC

1. Bluetooth Pairing - 730Hz Polling Rate:

(Requires the computer to have Bluetooth functionality)

- Switch the controller to PC mode. Then press and hold the pairing button for 2 seconds until the indicator light begins flashing rapidly, indicating that pairing mode has started.
- On your computer, open the Bluetooth settings, search for new devices, and select "GuliKit XW Controller" to pair.
- Once the interface displays "Connected", the pairing is complete.

2. Wired Connection - 1000Hz Polling Rate:

Set the controller to PC mode. Connect one end of the USB-C to USB-A data cable to the controller, and insert the other end into a USB-A port on your computer.

If you're using a desktop computer, it is recommended to use one of the USB ports on the back of the computer case for a more stable connection.

Wireless Pairing with Android Devices

- Set the controller to PC mode.
- Press and hold the pairing button for 2 seconds until the indicator light starts blinking quickly, indicating that pairing mode has been activated.
- On your phone, go to Bluetooth settings, search for new devices, and select "GuliKit XW Controller".
- The interface displays "Connected" to the new controller, indicating that the pairing is complete.

Pairing Methods with Switch / Switch 2

- Set the controller to NS mode, turn it on, then press and hold the pairing button for 2 seconds. The indicator light will blink quickly, indicating that pairing has started.
- When the Switch / Switch 2 is on the black screen (sleep) state, press the HOME button on the Joy-Con to wake it up. It will then enter the controller pairing interface, as shown below.



- Once the interface shows that a new controller is connected, the pairing is complete.

All customized settings mentioned below require holding the Setting button (⊙) while pressing the corresponding buttons. When customized settings are configured, the ⊙ indicator light will turn blue. When no customized settings are configured, the ⊙ indicator light will remain white. When the battery is low, the ⊙ indicator light will flash, and the vibration function will automatically turn off. Once the battery level is restored, vibration will turn back on automatically.



⊙ + ⊖ Clear All Settings (Reset)

Long vibration: Indicates that the reset process is complete and the controller has been restored to its default settings.

⊙ + ⊕ Joystick Dead Zone Setting

One vibration: Dead zone enabled on joysticks.

Long vibration: Dead zone disabled on joysticks (Default).

⊙ + (A, B, X, Y, R, ZR) Continuous Fire (Turbo) Setting

One vibration: Manual Turbo Mode - Continuous fire is activated while holding the button and stops when released.

Two vibrations: Auto Turbo Mode - Press the button once to start continuous fire, and press it again to stop.

Long vibration: Disables both manual and auto turbo modes. (Default)

⊙ + ⊕ Adjust Vibration Intensity

One vibration: Weak vibration.

Two vibrations: Standard vibration. (Default)

Three vibrations: Strong vibration.

Long vibration: Turn off vibration.

For more questions & answers, you can visit the website and navigate to the "Support" section and look for the "Frequently Asked Questions" (FAQ) related to the controller.

